


stagger sleeper seams minimum 2" (610mm)

hardwood flooring

1 1/2" (38mm) perimeter void

exterior wall

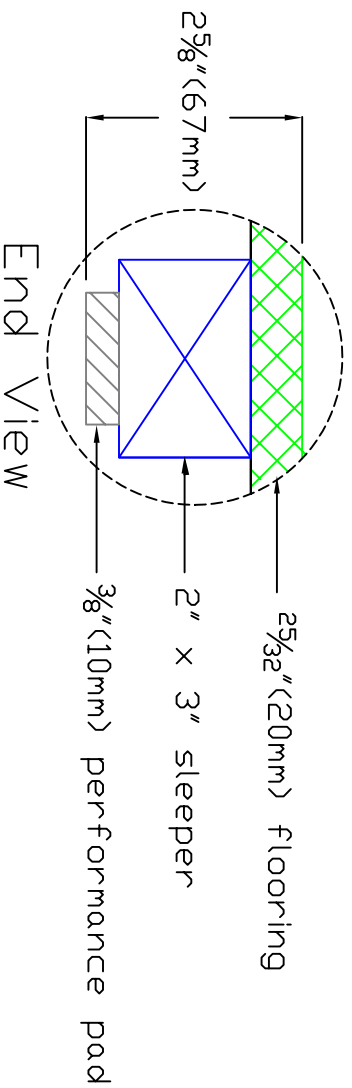

General Notes:

1. Sleepers to be installed @ right angle to direction finish flooring to be installed
2. When installing 3 3/2" (26mm) flooring, sleepers to be installed 12" o. c.
3. When installing 2 5/2" (26mm) 3rd grade, sleepers to be installed 8" o. c.

REVISIONS

LD.	DESCRIPTION	WHEN	WHO
—	drawing created	9-22-08	dhl



Aacer Flooring LLC  
 970 Dgden Road  
 Peshigo, WI 54157  
 Phone: 715-582-1181 Fax: 714-582-0308

AacerCush 1

DATE	9-22-08	FILE	aacer-cush192208
DRAWN BY	A Linstad	SHEET	1
CHECKED BY			
SCALE	n/a		