

1/4" (6 mm) void typical

top layer to run @ 45° angle to 1st layer

bottom layer of 3/2" (12 mm) plywood perpendicular to finish flooring direction



hardwood flooring

2" (51 mm) perimeter void

exterior wall

total system height = 2 1/2" (63.5 mm)

### Side Detail

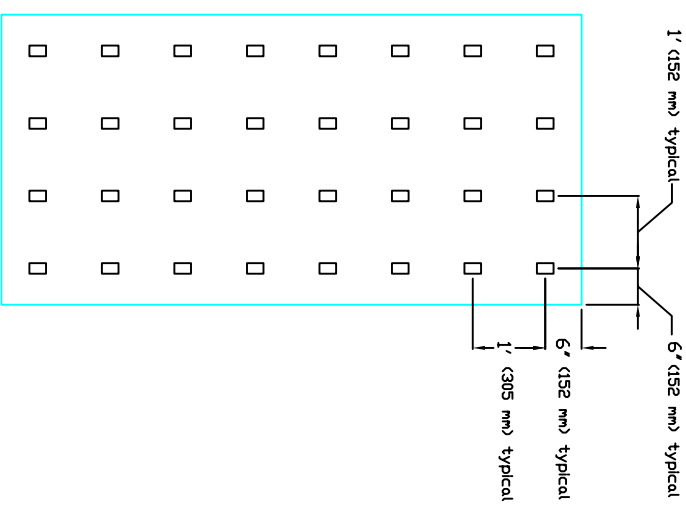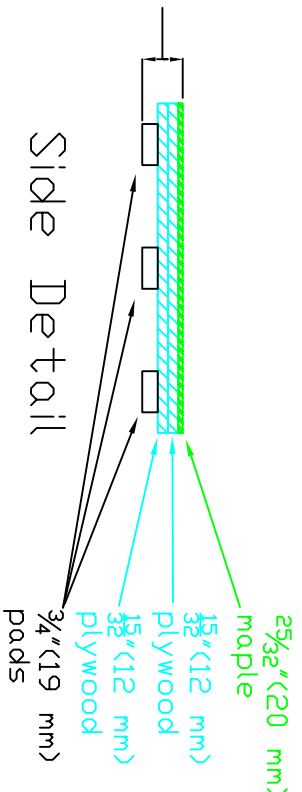

### Pad Detail

placement = 32 pads per 4'(1.2m) x 8'(2.4m) panel

### REVISIONS

ID.	DESCRIPTION	WHEN	WHO
1	drawing created	5-23-08	dhl



Accer Flooring LLC  
 970 Ogden Road  
 Peshtigo, WI 54157  
 Phone: 715-582-1181 Fax: 714-582-0308

### AccerFlex System

DESCRIPTION	DATE	FILE
PART NUMBER	5-23-08	accerflexsystems52308
SCALE	n/a	SHEET
		1