

AacerFlex™ EN-DIN


FLOATING SYSTEMS

AacerFlex™ EN-DIN is a performance sports floor system which meets the ergonomic needs of today's athlete through sufficient force reduction, increased energy return, as well as outstanding ball rebound characteristics. The unique pad minimizes potential deadspots by increasing pad surface contact area without compromising the load bearing ability of the system.




AacerFlex™ EN-DIN

AacerFlex™ EN-DIN incorporates precision engineered pads that integrates load bearing ability with enhanced athletic performance. AacerFlex EN-DIN can be specified for multipurpose rooms, competitive sports applications and dance/aerobics.

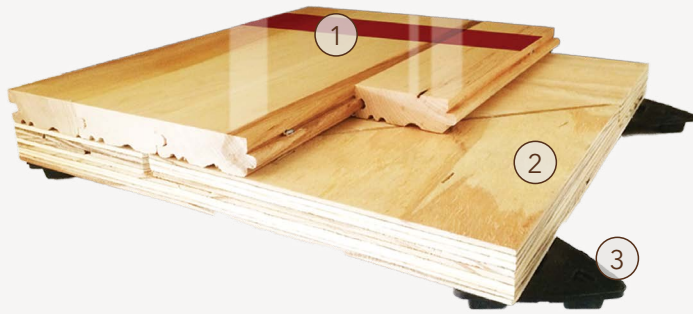


- 1. Precision-milled Aacer Maple
- 2. Two layers of 15/32" (12mm) NOM. Exposure 1, APA Rated Sheathing
- 3. 1/2" (12mm) TriPower™ Pad

WALL BASE

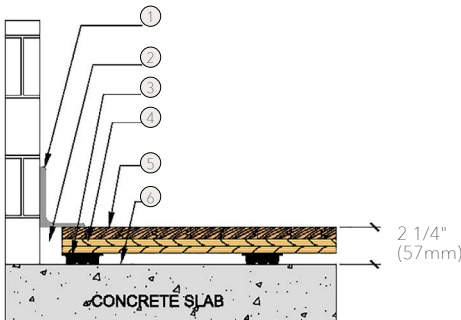


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1 1/2" (38mm) Min. Expansion Space
- 3. 1/2" (12mm) TriPower™ Pad
- 4. Two layers 15/32" (12mm) NOM. Exposure 1, APA Rated Sheathing
- 5. MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- 6. Vapor Barrier

THRESHOLD

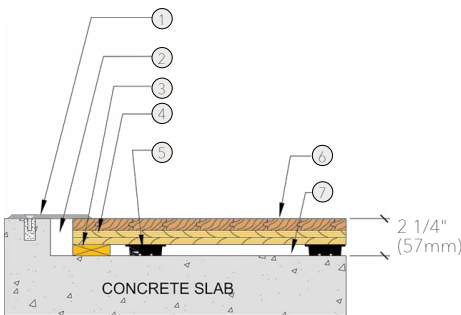

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1 1/2" (38mm) Min. Expansion Space
- 3. Solid Blocking
- 4. Two layers 15/32" (12mm) NOM. Exposure 1, APA Rated Sheathing
- 5. 1/2" (12mm) TriPower™ Pad
- 6. MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- 7. Vapor Barrier

EQUIPMENT

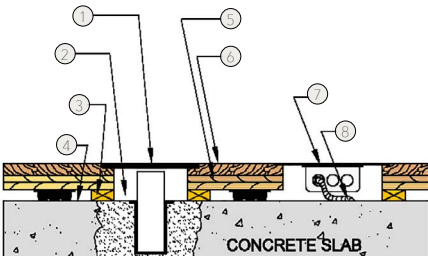

- 1. Floor Plate
- 2. 1 1/2" (38mm) Min. Expansion Space Required at all Insert & Electrical Penetrations
- 3. Solid Blocking at Floor Insert Penetrations
- 4. Vapor Barrier
- 5. Two layers 15/32" (12mm) NOM. Exposure 1, APA Rated Sheathing
- 6. MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- 7. Flush Electrical Box or Scorer's Box
- 8. Flexible Conduit

Certified



Green Status and LEED Contributors



- FSC® Certified Maple - MRC7
- FSC® Certified Subfloor Components - MRC7
- EQ - 4.2
- Regional Materials - MRC5.1 & 5.2

Optional Versions

*Other pad options available. Contact your Regional Sales Manager.

Resilience

1/2" (12mm) TriPower™ Pad

Slab Depression

1/2" (12mm) TriPower™ Pad
 • 25/32" (20mm) flooring – 2 1/4" (57mm)
 • 33/32" (26mm) flooring – 2 1/2" (64mm)

Subfloor Construction

Plywood

System Type

Floating

Testing Laboratory



Warranty

Lifetime available

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.



see us at Sweets.com

