

# MP XTremeTile



## SYNTHETIC SURFACES

MP XTremeTile is a 1" thick, 2'x2' square tile made of recycled rubber with EPDM color flecks. Installed as a "free-floating" system, it is held together with dowels and can easily be put over an existing floor, saving time and money. No adhesive is required for installation. Because XtremeTile is not glued down, damaged tiles can be easily replaced. XTremeTile is equipped with "feet" on the underside of the tile, allowing cables and wires to run neatly underneath while providing superior shock absorption and sound deadening.






# MP XTremeTile

MP XTremeTile's standard thickness is 1 inch. Tile size is 2'x2' (4 SF per tile) and is a free-floating system held together with dowels. It is perfect for weight rooms, home gyms and training centers.




1. EPDM Color Fleck Top Layer
2. Recycled Rubber Base Layer
3. Pedestal Feet to Conceal Cables and Wires

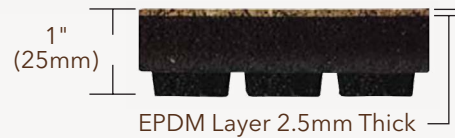


## STANDARD COLORS


Colors are representational only. Contact Aacer for actual color samples.




Black #00



Blue #45




Grey #46




Red #47




Tan2 #97A




Brown & Tans #100A




Purple & Greys #101




Gold & Greys #102




Blue & Greys #103




Red & Greys #104




Rust & Greys #105




Orange & Greys #106




Green & Greys #107A




Camel2 #43A



Blue Sapphire #500



Steel Wheel #15A



Platinum Wheel #502

Custom colors & logos available.

Wear Surface Density	60.0 lbs. / cu. ft., min.
Coefficient of Thermal Expansion	1.10 x 10 <sup>-3</sup> in. / ft. °F
Void Volume	13% minimum
Water Perm. Rate	0.045 cm / sec.
Ave. Critical Radiant Flux ASTM E 648-09a	0.19 W / cm <sup>2</sup>
Tear Resistance ASTM D624, Die C	13.13 kN / m
Abrasion ASTM D3389, 2000 Cycles, H18 Wheels	0.1 or 0.20 mg loss / cycle
Accel. Aging DIN 1835 Part 6, 2000 Hrs., H18 Wheels	105% Tensile Retention 87% Elongation Retention
Tensile Strength ASTM D412	200 lb. / in. <sup>2</sup> , min.
Flexibility ASTM F437	pass 1/4 mandrell
Static Load Limit ASTM F970	400 lb. / in. <sup>2</sup> < 0.005 in.
Coefficient of Friction ASTM D2047	> 0.9
Chem. Resistance ASTM F925	<ul style="list-style-type: none"> <li>• 5% Acetic Acid no change</li> <li>• 70% Isopropyl Alcohol no change</li> <li>• 5% Sodium Hydroxide no change</li> <li>• 5% Hydrochloric Acid no change</li> <li>• 5% Ammonia no change</li> <li>• Bleach no change</li> <li>• 5% Phenol no change</li> <li>• Sulfuric Acid no change</li> </ul>
Noise Red. Coeff. ASTM C423	0.10 sabine / ft. <sup>2</sup>
Thermal Cond. ASTM C518	approx. 0.406 Btu-in. / hr.-ft. <sup>2</sup> °F
Impact Insulation Class ASTM E492	49
Sound Trans. Coeff. ASTM E413	51
Sustainability ASTM E2129	Data collected
VOC Wash. State IAQ Test CHPS/CA 01350 ASTM D5116	Pass

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.



see us at  
**Sweets.com**

