


# FLOATING




## SuperBond Flex™


SuperBond Flex™ is a fmaistic set edge-grain maple parquet adhered to a floating subfloor system. Used in sport floor applications where system height is a factor.

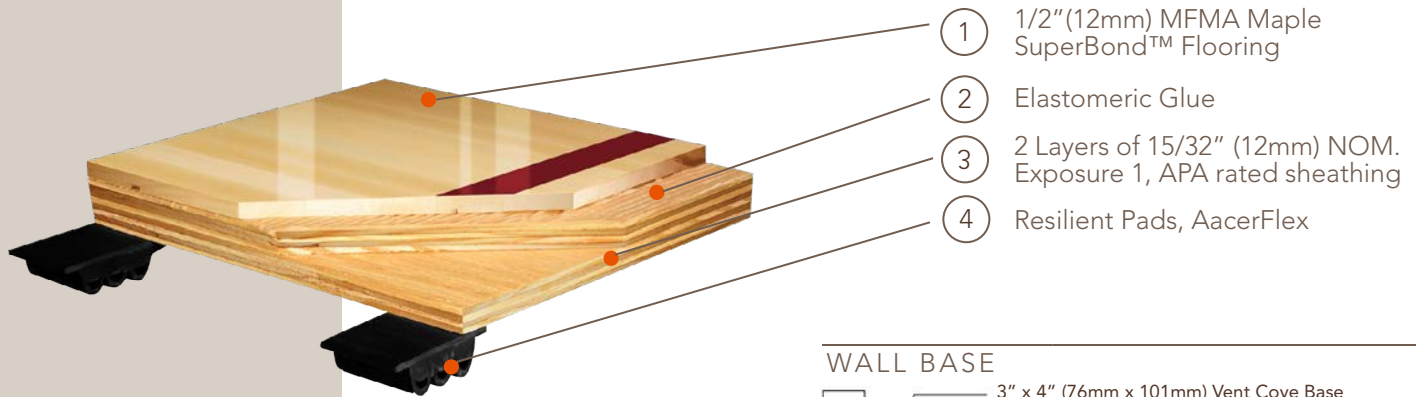


### WALL BASE

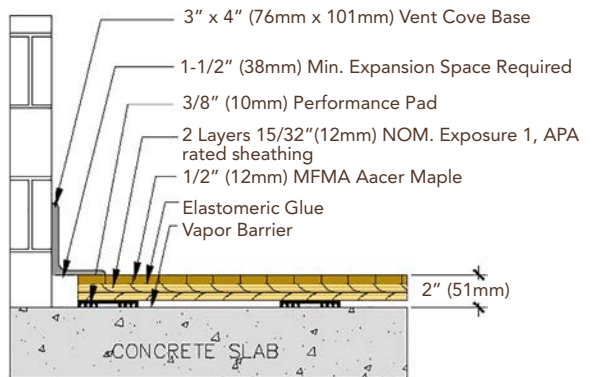

### THRESHOLD

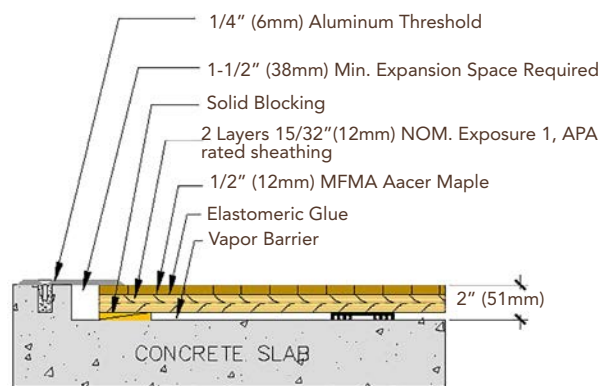

### EQUIPMENT

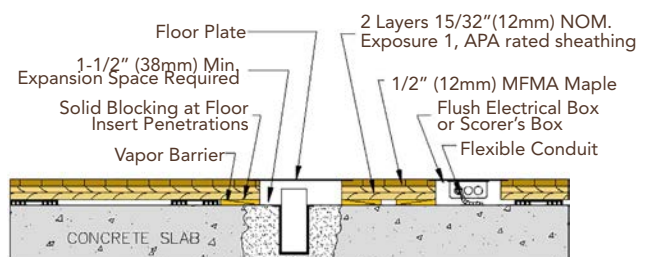

Certified	
Green Status LEED Contributors	 FSC® Certified Maple - MRC7 FSC® Certified Subfloor Components - MRC7 EQ - 4.2 Regional Materials - MRC5.1 & 5.2
Resilience	AacerFlex Pad, EcoDIN Pad, TriPower™ Pad, AacerCush Pad, Foam Padoam
Slab Depression	<b>3/4" (20mm) EPDM Pads</b> 1/2" (12mm) Flooring - 2-1/4" (57mm)  <b>7/16" (10mm) EcoDIN Pads</b> 1/2" (12mm) Flooring - 2" (51mm)
Subfloor Construction	Plywood
System Type	Floating System
Testing Laboratory	
Warranty	Lifetime available