


























## FIXED RESILIENT



## AacerChannel™VLP

AacerChannel™ VLP is a fixed resilient sports performance floor system that features a monolithic subfloor with full flex and a full thickness APA engineered underlayment to maximize system performance. The result is a floor with increased stability, shock absorbency, energy return and low vibration.

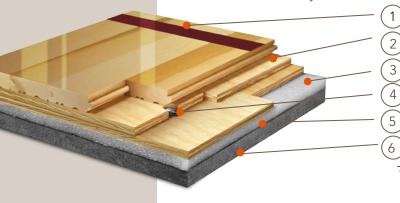

Precision milled Aacer Maple

Integrated Panels form a Monolithic Subfloor

Performance Foam


Collared Steel Drive Pin

6mil polyethylene Vapor Barrier


Concrete


## WALL BASE

Drill and Pin Anchorage Certified **Green Status LEED Contributors** FSC® Certified Maple - MRc7 FSC® Certified Subfloor Components - MRc7 EQ - 4.2 Regional Materials - MRc5.1 & 5.2 Channeled Foam, 12mm TriPower™ Pad, EcoDIN **Optional Versions** Resilience Performance Foam 1/2" (12mm) Performance Foam, Slab Depression 1/2" (12mm) TriPower™ Pad 25/32" (20mm) flooring - 1 7/8" (48mm) 33/32" (26mm) flooring - 2 1/8" (54mm) **Subfloor Construction** Pre-manufactured panels System Type Fixed Resilient / Floating **Testing Laboratory** ASET ( #5.647.183 U.S. Patent#



## THRESHOLD





It is the policy of Aacer Flooring to continuously imporve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser May 2016

Warranty

Lifetime available