


























FLOATING



ScissorLocTM I

Available ScissorLoc[™] Floor Systems: I, II, III, DC and LP

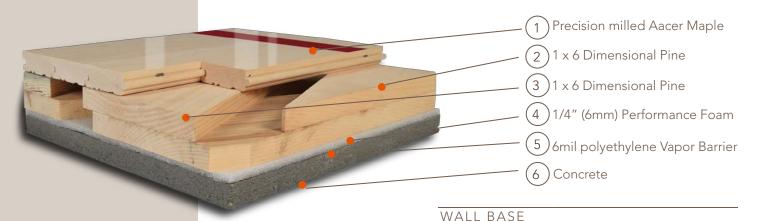

Certified





Green Status LEED Contributors



FSC® Certified Maple - MRc7 FSC® Certified Subfloor Components - MRc7

EQ - 4.2 Regional Materials - MRc5.1 & 5.2

Optional Versions

I, II, III, DC, LP, PowerVent™

Resilience

1/4" Performance Foam *other pad options available

Slab Depression

ScissorLoc™ I

25/32" (20mm) flooring - 2 1/2" (64mm) 33/32" (26mm) flooring - 2 3/4" (70mm)

Retrofit

System may be adjusted to fit any slab profile

Subfloor Construction

Solid Pine

System Type

Floating System

Testing Laboratory






U.S. Patent#


#5,299,401


Warranty

Lifetime available

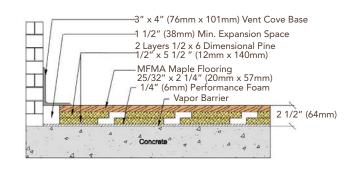

THRESHOLD

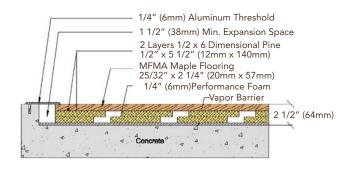



.582.1181

It is the policy of Aacer Flooring to continuously imporve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.

July 2016