



AacerCush II

Increased structural integrity, shock absorbency and energy return make the AacerCush II one of the most widely accepted athletic flooring systems for field houses, combination synthetic and wood facilities, gymnasiums, dance floors, stages or multi-purpose rooms.

Precision milled AacerFit Maple 2 layers of 15/32" (12mm) APÁ underlayment AacerCush Resilient Pad 6mil polyethylene vapor barrier 5 Concrete

Certified*









Green Status LEED Contributors









FSC Maple - MRc7 FSC SubFloor Components - MRc7 EQ - 4.2

Regional Materals - MRc5.1 & 5.2

Optional Versions

EcoDin, 1/4" and 1/2" Performance Foam, P3*

Resilience

AacerCush PVC Pads

Slab Depression

3/8" (10 mm) PVC Pad

25/32" (20mm) flooring - 2 1/8" (54mm) 33/32" (26mm) flooring - 2 3/8" (60mm)

7/16" (11mm) EcoDin Pad

25/32" (20mm) flooring – 2 1/8" (48mm) 33/32" (26mm) flooring – 2 7/8" (61mm)

3/4" (20mm) P3 Pad

25/32" (20mm) flooring – 2 1/2" (64mm) 33/32" (26mm) flooring - 2 3/4" (70mm)

Subfloor Construction

Plywood

System Type

Floating Floor System

Testing Laboratory







Warranty

Lifetime available


WALL BASE



THRESHOLD



EQUIPMENT

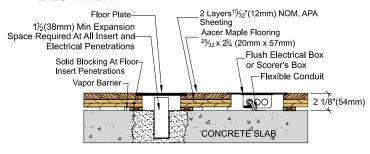

AacerFlooring.com

(877) 582-1181