



























FLOATING



AacerFlex™

AacerFlex[™] incorporates precision engineered pads that integrates load bearing ability with enhanced athletic performance. AacerFlex can be specified for multipurpose rooms, competitive sports applications and dance/aerobics. Available in AacerFlex[™], AacerFlex[™] TP, and AacerFlex[™] EN-DIN with P3 Pads and EcoDin Pads.



Certified



















FSC SubFloor Components - MRc7 EQ - 4.2 Regional materials MRc5.1 & 5.2

Optional Versions

Aerobics and dance 50 duro blue, 60 duro orange, 70 duro red AacerFlex, P3, EcoDin

Resilience

Aacer TriPower Pad

Slab Depression

3/4" (20mm) TriPower Pad, P3, AacerFlex

25/32" (20mm) flooring - 2 ½" (64mm) 33/32" (26mm) flooring - 2 ¾" (70mm)

7/16" (11mm) EcoDin Pad

25/32" (20mm) flooring - 2 1/8" (55mm) 33/32" (26mm) flooring - 2 1/8" (73mm)

Subfloor Construction

Plywood

System Type

Floating System

Testing Laboratory






U.S. Patent#


_


Warranty

Lifetime available



THRESHOLD



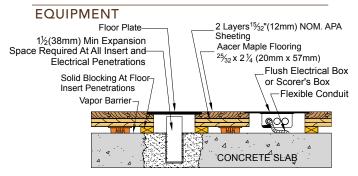

AacerFlooring.com

(877) 582-1181