


# FIXED RESILIENT



## UltraFlex™ DC

The UltraFlex™ DC system utilizes dimensional wood sub-floor which absorbs shock and reduces leg fatigue. The system also moves to accommodate changes in humidity with its special optional "Z" retainer while maintaining peak performance of the playing surface. The sub-floor design also allows for excellent under floor air flow.

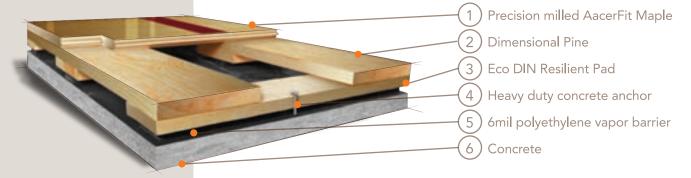

Anchorage

Drill & Pin / Z clip retainer

Certified





Green Status LEED Contributors





FSC Maple - MRc7

FSC SubFloor Components - MRc7

EQ - 4.2

Regional materials - MRc5.1 & 5.2

**Optional Versions** 

 $PowerVent^{TM}$  Airflow System

Resilience

EcoDin Pads

Slab Depression

7/16" (11 mm) EcoDin Pads, 1/2" Performance Foam, 1/2" TriPower Pad 25/32" (20mm) flooring – 2 ½" (64mm)

33/32" (26mm) flooring - 2 3/4" (71mm)

**Subfloor Construction** 

Solid Dimensional Pine (FSC)

System Type

Fixed Resilient

**Testing Laboratory** 





U.S. Patent#

Ultra-Flex DC with Clip U.S. Patent #5,526,621 Ultra-Flex DC with Pin U.S. Patent #6,557,314 B2


Warranty

Lifetime available


\*Option

Retrofit with optional Z - Clip steel anchor


\*Optional Z - Clip steel anchor




#### WALL BASE



#### **THRESHOLD**



### **EQUIPMENT**



AacerFlooring.com

(877) 582-1181

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.