

## FLOATING



## AacerFlex™

AacerFlex<sup>™</sup> incorporates precision engineered pads that integrates load bearing ability with enhanced athletic performance. AacerFlex can be specified for multipurpose rooms, competitive sports applications and dance/aerobics. Available in AacerFlex<sup>™</sup>, AacerFlex<sup>™</sup> TP, and AacerFlex<sup>™</sup> EN-DIN with P3 Pads and EcoDin Pads.



Certified







Green Status LEED Contributors







FSC Maple - MRc7 FSC SubFloor Components - MRc7 EQ - 4.2

Regional materials MRc5.1 & 5.2

Optional Versions

Aerobics and dance 50 duro blue, 60 duro orange, 70 duro red AacerFlex, P3, EcoDin

Resilience

Aacer TriPower Pad

Slab Depression

3/4" (19mm) TriPower Pad, P3, AacerFlex 25/32" (20mm) flooring - 2 ½" (64mm)

25/32" (20mm) flooring - 2 ½" (64mm) 33/32" (26mm) flooring - 2 ¾" (70mm)

7/16" (11mm) EcoDin Pad

25/32" (20mm) flooring - 2 1/8" (55mm) 33/32" (26mm) flooring - 2 1/8" (73mm)

Subfloor Construction

Plywood

System Type

Floating System

Testing Laboratory








U.S. Patent#


F Ye


Warranty

Lifetime available



## **THRESHOLD**



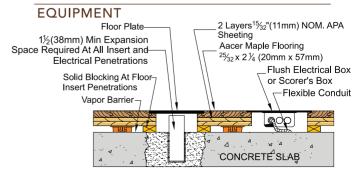

AacerFlooring.com

(877) 582-1181

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.