


FLOATING



SuperBond Flex™

Aacer SuperBond Flex™ is a mastic set edge-grain maple parquet adhered to a floating sub-floor system. Used in sport floor applications where system height is a factor.

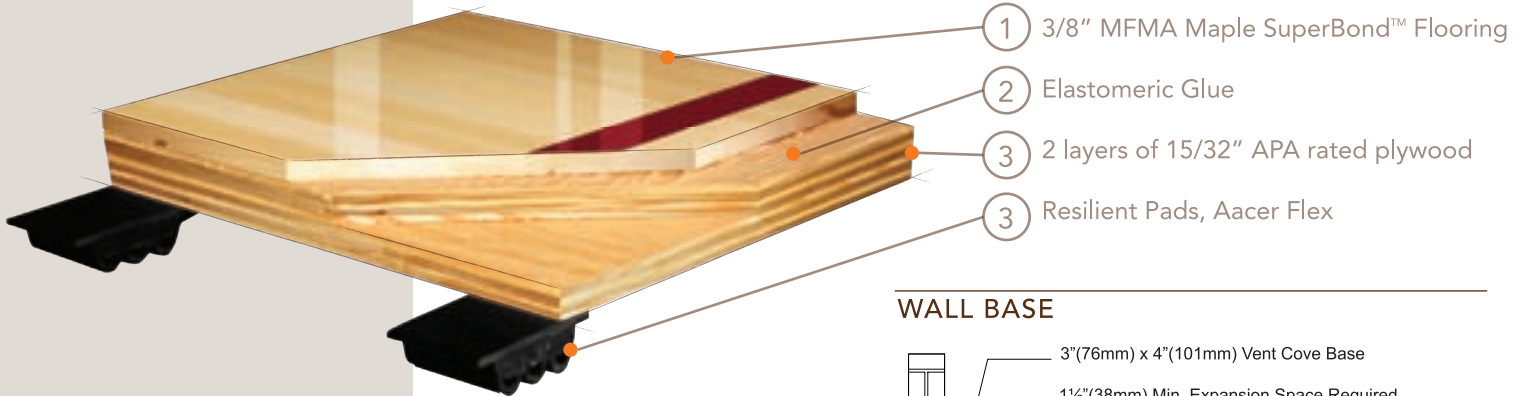

Certified



Green Status
LEED Contributors



FSC Maple - MRc7
FSC SubFloor Components - MRc7
EQ - 4.2
Regional Materials - MRc5.1 & 5.2

Resilience

Aacer Flex Pad, EcoDin Pad, Tri Power

Optional Versions

Tri Power Pad, EcoDin Pad,
1/2", 1/4" Foam

Slab Depression

3/4" (19 mm) EPDM Pads
1/2" (13mm) flooring - 2 1/4" (57mm)
3/8" (9.5mm) flooring - 2 1/8" (54mm)

7/16" (11 mm) EcoDin Pads
1/2" (13mm) flooring - 2" (51mm)
3/8" (9.5mm) flooring - 1 7/8" (47mm)

Subfloor Construction

Plywood

System Type

Floating System


Testing Laboratory




Warranty

Lifetime available


WALL BASE

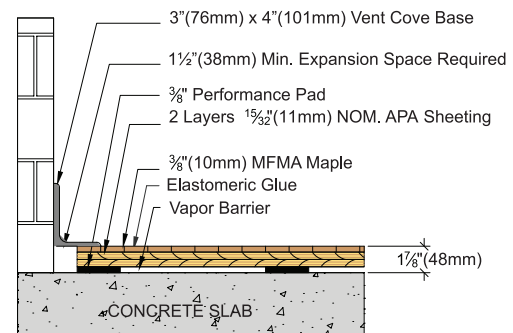

THRESHOLD

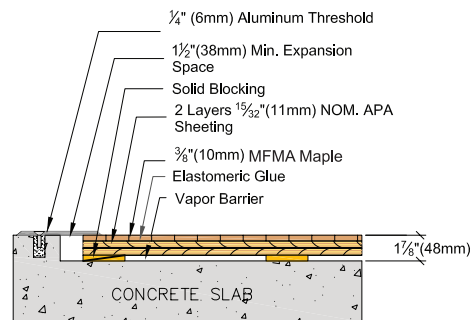

EQUIPMENT

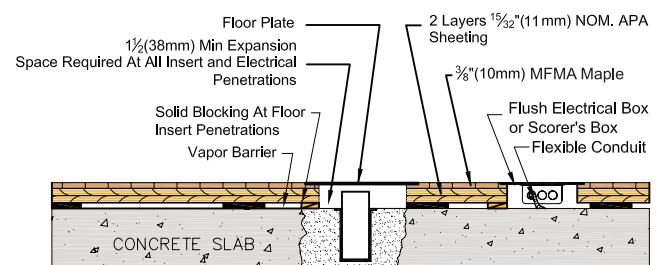

AacerFlooring.com

(877) 582-1181

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.