


FIXED RESILIENT



UltraChannel DC

Designed for the highest level of performance, UltraChannel's unique fixed resilient design enables an unparalleled combination of comfort and play in a stable floor system.

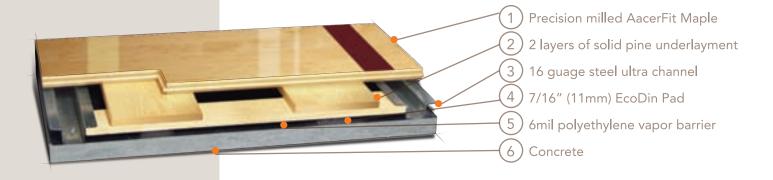

Anchorage Certified Steel Channel





Green Status LEED Contributors





FSC Maple - MRc7

FSC SubFloor Components - MRc7

EQ - 4.2

Regional materials - MRc5.1 & 5.2

Optional Versions

PowerVent[™] Airflow System

Resilience

EcoDin Pads

Slab Depression

7/16" (11 mm) EcoDin Pads

25/32" (20mm) flooring – 2 ¼" (57mm) 33/32" (26mm) flooring – 2 ½" (64mm)

Subfloor Construction

Solid Pine

System Type

Fixed Resilient


Testing Laboratory






Warranty

Lifetime available





EQUIPMENT

