
























WOOD/SYNTHETIC



AacerFlex[™] TP with MP Sport

AacerFlex ™ TP with MP Sport is the perfect choice for high-volume, multipurpose facilities that requires a floor that integrates load bearing ability and enhances athletic performance. Combine your wood floor seamlessly with a multi-use synthetic floor without transitions.

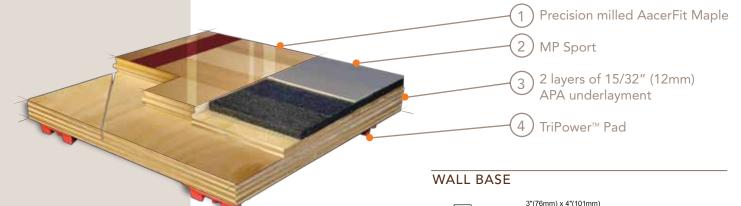

Certified







Green Status LEED Contributors







FSC certified Maple - MRc7 FSC certified SubFloor Components - MRc7 FO - 4 2

Regional materials MRc5.1 & 5.2

Optional Versions

Aerobics and dance 50 duro blue, 60 duro orange, 70 duro red TriPower AacerFlex, EcoDin, ½" TriPower Pad

Resilience

Aacer TriPower Pad / MP Sport 8+2

Slab Depression

¾" (19mm) TriPower Pad, AacerFlex

25/32" (20mm) flooring - 2 ½" (64mm) 33/32" (26mm) flooring - 2 ¾" (70mm)

1/2" (12mm) TriPower Pad

25/32" (20mm) flooring - 2 1/4" (57mm) 33/32" (26mm) flooring - 2 1/2" (64mm)

7/16" (11mm) EcoDin Pad, ½" TriPower Pad 25/32" (20mm) flooring - 2 ½" (55mm)

33/32" (26mm) flooring - 2 1/8" (73mm)

Subfloor Construction

Plywood

System Type

Floating System

Testing Laboratory







U.S. Patent#

Yes

Warranty


Lifetime available

AacerFlooring.com


(877) 582-1181

Vent Cove Base 1/½"(38mm) Min. Expansion Space ½"(19mm) Tri-Pow™ Pad 2 Layers ½"(12mm) NOM. APA Sheeting 1 Layer ½"(9.5mm) ULD Plywood MP Sport 8mm Base with 2mm wear surface (Total Thickness .394" ((10mm)) Vapor Barrier 2 1/½"(64mm)

THRESHOLD



EQUIPMENT



It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.