




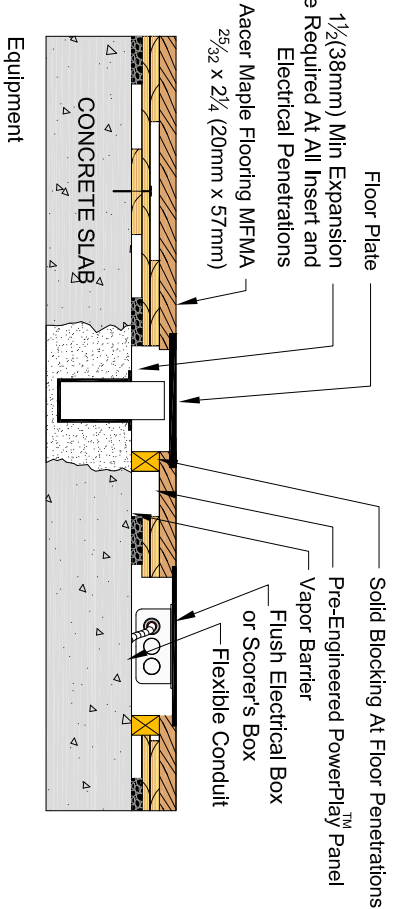
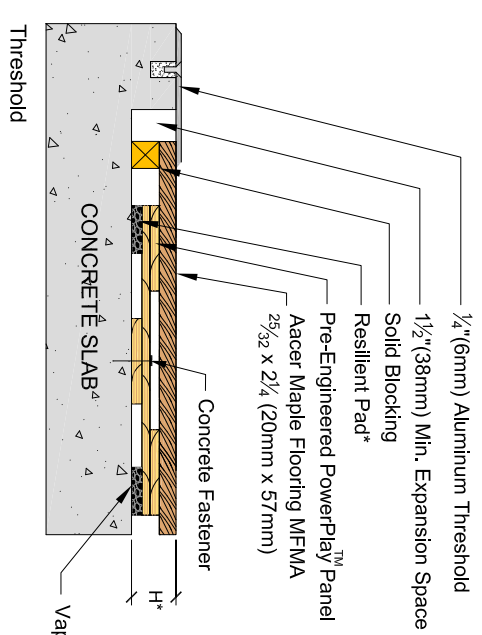
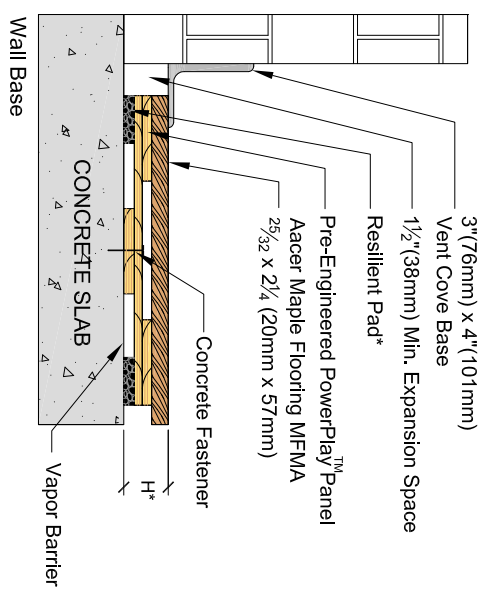


Acerc PowerPlay™ LP

| System | Resilient Pad Options* | Pad Description | Profile Height (H*) |
|--------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------|---------------------|
| DIN |  | 3/4" (19mm) Tri-Power Pad. Available in 3 ASTM Harnesses - 50, 60, 70 | 23/8" (60mm) |
| II |  | 3/4" (19mm) Acer Flex | 23/8" (60mm) |
| LP |  | 1/2" (12mm) Tri-Power Pad. ASTM Harness 55 | 21/8" (54mm) |
| LP |  | 7/16" (11mm) EcoDin | 21/8" (53mm) |
| VLP |  | 3/8" (10mm) AcerCush | 17/8" (48mm) |

* Refer to key for pad options and system heights



REVISIONS

| LD. | DESCRIPTION | WHEN | WHO |
|-----|--------------------------|----------|-----|
| - | Vapor Barrier Text Added | 5-8-2012 | SPD |

Acerc Flooring
970 Ogden Rd
Peshigo, WI 54157
Phone: 715-582-1181
Fax: 715-582-1182

DESCRIPTION:
Acerc PowerPlay LP



| | | |
|--------------|-----------|-------------------|
| PART NUMBER: | DATE: | FILE: |
| n/a | 3-24-2015 | AcercPowerPlay_LP |
| SCALE: | DRAWN BY: | SHEET: |
| n/a | S Daniel | 1 |
| CHECKED BY: | | |