UltraFlex™ DC

Resilient Pad Options*	Pad Description	Profile Height (H*)
	¾" (19mm) Tri-Power Pad. Available in 3 ASTM Harnesses - 50, 60, 70	3" (76mm)
	¾" (19mm) Aacer Flex	3" (76mm)
	½" Performance Foam	2¾" (70mm)
	½" (12mm) Tri-Power Pad. ASTM Harness 55	2¾" (70mm)
	7/16" (11mm) EcoDin	2¾" (70mm)

* Refer to key for Pad options and system heights

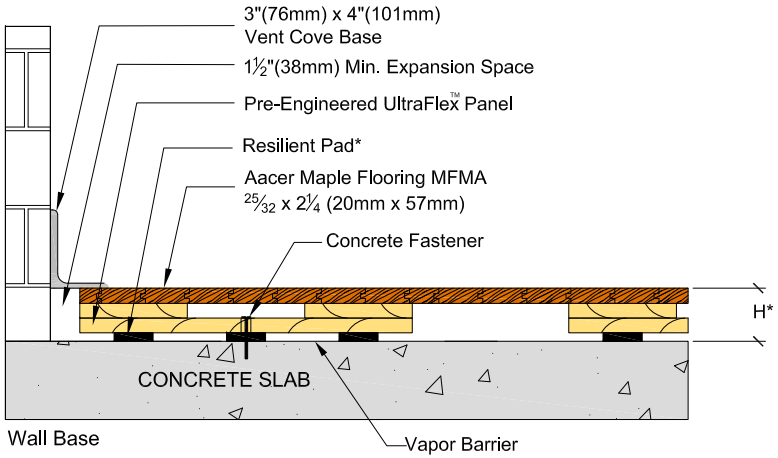

Wall Base

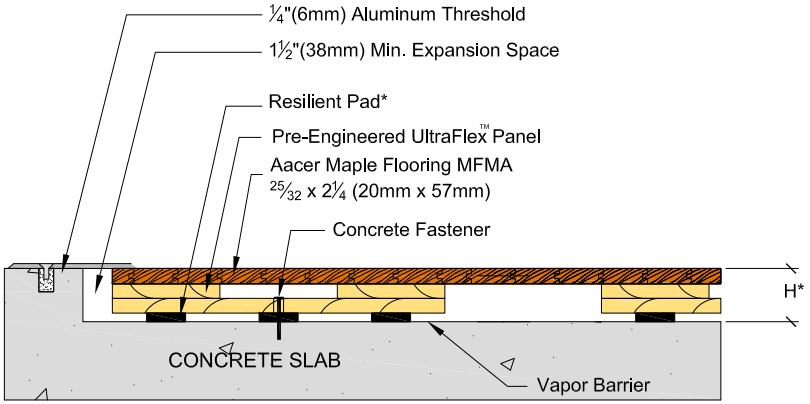

Threshold

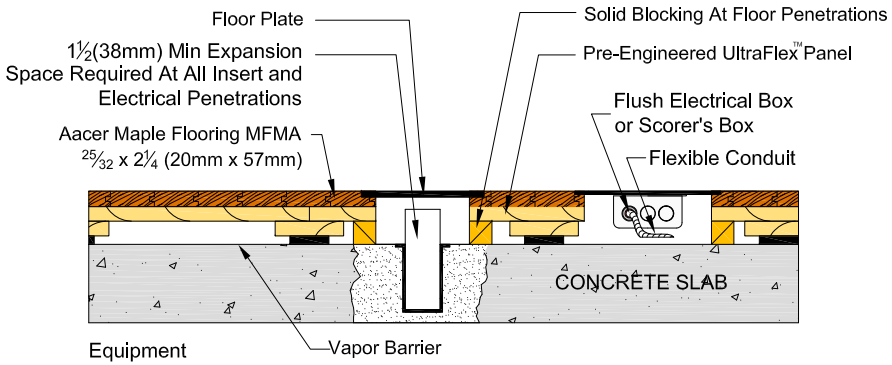

Equipment

REVISIONS

	Description	Date	Who
-			

Aacer Flooring
970 Ogden Rd
Peshtigo, Wi 54157

Phone: 715-582-1181
Fax: 715-582-1182

DESCRIPTION: UltraFlex™ DC

PART NUMBER:

DATE: 3-24-2015

FILE: UltraFlex_DC

SCALE: n/a

DRAWN BY: S Daniel

CHECKED BY:

SHEET: 1

AACER SPORTS FLOORING