

WALLBASE

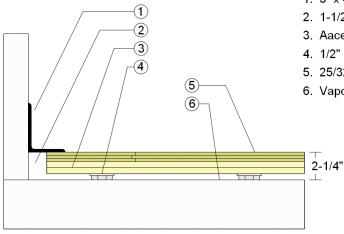


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1-1/2" (38mm) min. Expansion Space
- 3. AacerFlex Plywood Subfloor Panels
- 4. 1/2" (12mm) TriPower Pad
- 5. 25/32" (20mm) MFMA Maple Flooring
- 6. Vapor Retarder

2-1/4" (57mm)

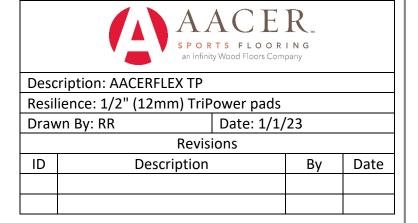

THRESHOLD

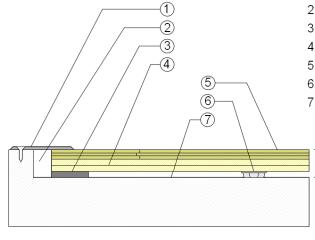


- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1-1/2" (38mm) min. Expansion Space
- 3. Solid Blocking at Doorway
- 4. AacerFlex Plywood Subfloor Panels
- 5. 25/32" (20mm) MFMA Maple
- 6. 1/2" (12mm) TriPower Pad
- 7. Vapor Retarder


2-1/4" (57mm)

EQUIPMENT

- 1. Floor Plate
- 2. 1-1/2" (38mm) Expansion Space at all Inserts and **Electrical Penetrations**
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert

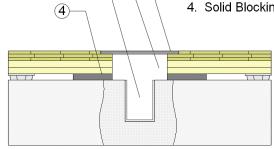




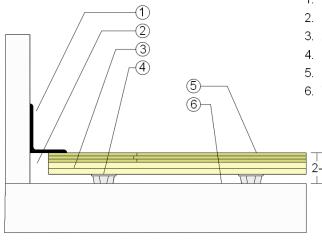

- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1-1/2" (38mm) min. Expansion Space
- 3. AacerFlex Plywood Subfloor Panels
- 4. 3/4" (19mm) TriPower Pad
- 5. 25/32" (20mm) MFMA Maple Flooring
- 6. Vapor Retarder

2-1/2" (64mm)

THRESHOLD

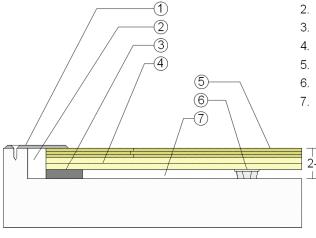

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1-1/2" (38mm) min. Expansion Space
- 3. Solid Blocking at Doorway
- 4. AacerFlex Plywood Subfloor Panels
- 5. 25/32" (20mm) MFMA Maple
- 6. 3/4" (19mm) TriPower Pad
- 7. Vapor Retarder

2-1/2" (64mm)





Description: AACERFLEX TP

Resilience: 3/4" (19mm) TriPower pads

Drawn By: RR Date: 1/1/23

Revisions

ID Description By Date

EQUIPMENT

- 1. Floor Plate
- 2. 1-1/2" (38mm) Expansion Space at all Inserts and **Electrical Penetrations**
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert

