

AacerBase

FIXED RESILIENT SYSTEM




AacerBase is an athletic floor option with very high shock absorption and good basketball response. Pre-manufactured subfloor panels with ECO resilient pads attached are secured to the concrete substrate to provide the environmental stability and force reduction of a fixed resilient floor.






- 1. Precision-milled Acer Maple
- 2. APA Plywood Subfloor
- 3. Flooring Nail
- 4. Substrate Anchor
- 5. ECO Resilient Pad
- 6. Vapor Retarder

WALLBASE

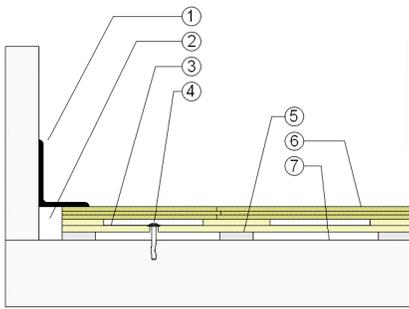


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. AcerBase Subfloor Panel
- 4. Concrete Anchor Pin Assembly
- 5. ECO Resilient Pad
- 6. 25/32" (20mm) MFMA Maple Flooring
- 7. Vapor Retarder

THRESHOLD

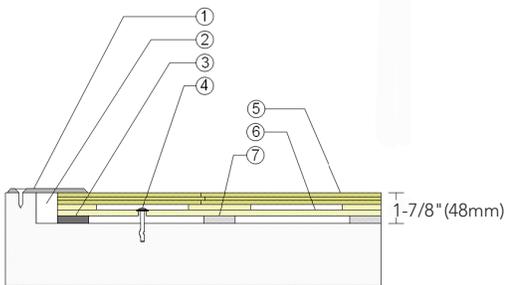

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. Solid Blocking at Doorway
- 4. Concrete Anchor Pin Assembly
- 5. 25/32" (20mm) MFMA Maple Flooring
- 6. AcerBase Subfloor Panel
- 7. ECO Resilient Pad

EQUIPMENT

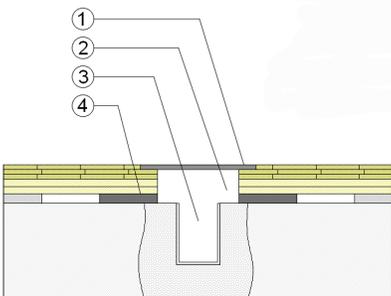

- 1. Floor Plate
- 2. 1-1/2" (38mm) Min. Expansion Space at all Inserts & Electrical Penetrations
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert

Certification



Anchorage

Drill and Pin

Green Status and LEED Contributors



- FSC® Certified Maple - MR
- FSC® Certified Subfloor Components - MR
- Environmental Quality - EQ
- Regional Materials - MR

Resilience

ECO Resilient Pads

Slab Depression

- 25/32" (20mm) Flooring - 1-7/8" (48mm)

Subfloor Construction

Engineered Plywood Subfloor

System Type

Fixed Resilient

Optional Protection System

PowerVent Airflow System

Testing Laboratory Partners



It is the policy of Acer Sports Flooring to continuously improve its line of products. Therefore, Acer Sports Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.