

TriPower™ Pad

ACCESSORY



The next generation in sports performance pad, Aacer's TriPower™ Pads provide certified performance systems with increased load handling. The TriPower™ Pad's unique, wide stance gives greater response, consistency, and lower vibration than other pad designs.




TriPower™ Pad offers superior shock absorption and vibration dampening. The unique blend of EPDM ensure stability and longevity required by high performance floors.



1. Structural Webs - Cross-Link
 - a. Greater load carrying ability
 - b. Vibration attenuation
 - c. Increased uniformity and consistent response
2. Stage II Heavy-Duty Load Distribution
3. 3-point Surface Contact Shock Pads - Athletic Resilience

Composition	EPDM Rubber / Recyclable
Hardness	Shore A
ASTM Durometer	Black, 1/2" (12mm), 50D
	Red, 3/4" (19mm), 70D
	Black, 3/4" (19mm), 60D
	Blue, 3/4" (19mm), 50D
Triangular Footprint	3 Point Primary Surface Contact
ASTM D412 Tensile PSI	1810
ASTM D412 Elongation	648
Loading	Excellent
Performance Information	

DETAIL DRAWINGS

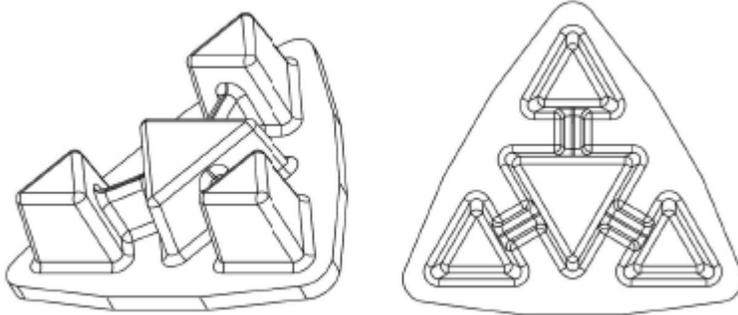

AACER PAD OPTIONS

U.S. Patent # #5,988,915



TriPower™ Black
1/2" (12mm)
50D



TriPower™ Red
3/4" (19mm)
70D



TriPower™ Black
3/4" (19mm)
60D



TriPower™ Blue
3/4" (19mm)
50D



ECO
1/4" (6mm), 3/8" (9.5mm),
1/2" (12mm), 5/8" (16mm),
3/4" (19mm)



AcerCush
3/8" (9.5mm)



Open Cell Foam
1/2" (12mm),
3/4" (19mm)



Performance Foam
1/4" (6mm), 1/2" (12mm),
3/4" (19mm)

Aacer systems meet and exceed all 3rd party industry testing standards.

- ASTM 2137 low temperature brittleness
 - 3 min @ -40 - pass
- ASTM D395 compression set
 - 22 hours @ 70c set %-20

It is the policy of Aacer Sports Flooring to continuously improve its line of products. Therefore, Aacer Sports Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.