



ASSEMBLED COMPONENTS

Rev A

Rev B

Coverage: 16 SF per Panel

DW Series
"Three Point"

Date: 5-27-24

Date :

Requires:

- 32 SF of 15/32" Plywood
- 16 SF 2 PCF 1/2" CC Foam
- 3 ea 2-1/2" Anchor / Bushing / and Washer


By:

For:


Manufactured from two layers of 15/32" x 2' x 8' Plywood

(Dimensions of plywood sections and spacing are nominal as affected by saw kerfs when cut)

BOTTOM SECTION

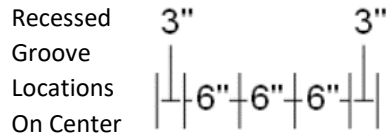

TOP SECTION

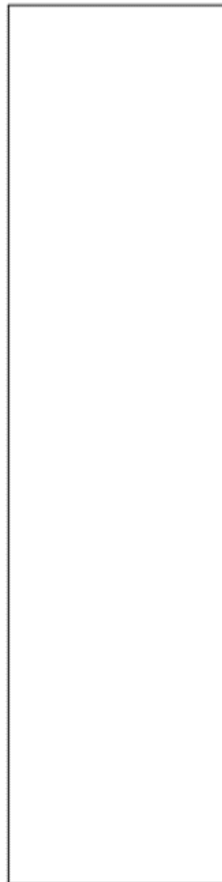

ASSEMBLED PANEL

Counterbore anchor pockets with 1-1/2" diameter hole through top section and 5/8" diameter hole through bottom section

RECESSED GROOVE

