

# Programme Dance IV

FLOATING SYSTEM




**Programme Dance IV includes two full layers of subfloor sheathing resting on TriPower resilient pads offering the lowest optional durometer value for the highest shock absorption. TriPower pads are designed to engage added support when impacts exceed intended activity.**






- 1. Precision-milled MFMA Aacer Maple
- 2. Programme Plywood Subfloor Panel
- 3. 3/4" (19mm) TriPower Pad

## WALLBASE

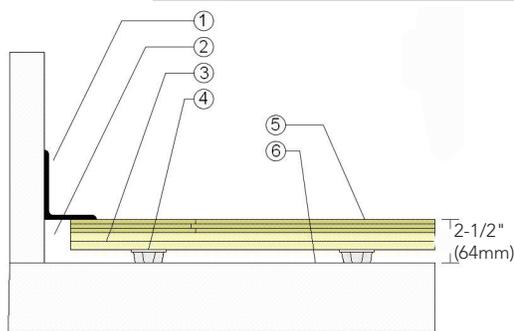


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. Programme Plywood Subfloor Panel
- 4. 3/4" (19mm) TriPower Pad
- 5. 25/32" (20mm) Aacer MFMA Maple Flooring
- 6. Vapor Retarder

## THRESHOLD

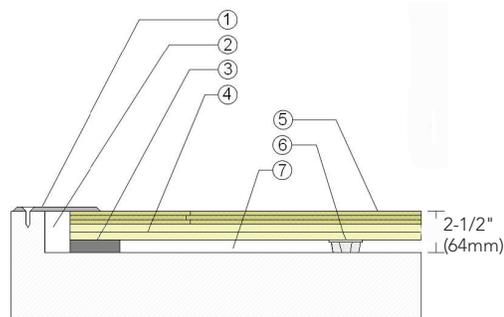

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. Solid Blocking at Doorway
- 4. Programme Plywood Subfloor Panel
- 5. 25/32" (20mm) Aacer MFMA Maple Flooring
- 6. 3/4" (19mm) TriPower Pad
- 7. Vapor Retarder

## EQUIPMENT

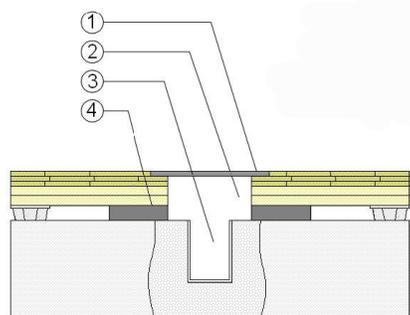

- 1. Floor Plate
- 2. 1-1/2" (38mm) Min. Expansion Space at all Inserts & Electrical Penetrations
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert

Green Status and LEED Contributors



- FSC® Certified Maple - MR (Optional)
- FSC® Certified Subfloor Components - MR (Optional)
- Environmental Quality - EQ
- Regional Materials - MR

Resilience 3/4" (19mm) TriPower Pad

Slab Depression • 25/32" (20mm) flooring - 2-1/2" (64mm)

Optional Programme Dance Systems Programme Dance I  
Programme Dance II  
Programme Dance III

Subfloor Construction Plywood Panels

System Type Floating

Testing Laboratory Partners



*It is the policy of Aacer Sports Flooring to continuously improve its line of products. Therefore, Aacer Sports Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.*