

# AacerCush I

## FLOATING SYSTEMS

Resilience, low cost and ease of installation make AacerCush I one of the most widely utilized athletic floors. AacerCush I is ideal for racquetball and squash courts, stage floors, gymnasiums and multipurpose rooms.






# AacerCush I




- 1. Precision-milled Aacer Maple
- 2. 2" x 3" (38mm x 64mm) AacerCush Sleeper
- 3. 3/8" (10mm) AacerCush Pad

## WALL BASE

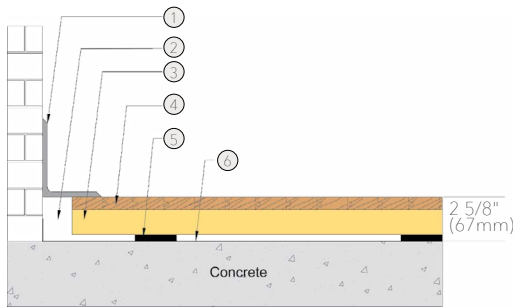


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1 1/2" (38mm) Min. Expansion Space
- 3. AacerCush Sleeper
- 4. MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- 5. 3/8" (10mm) AacerCush Pad
- 6. Vapor Barrier

## THRESHOLD

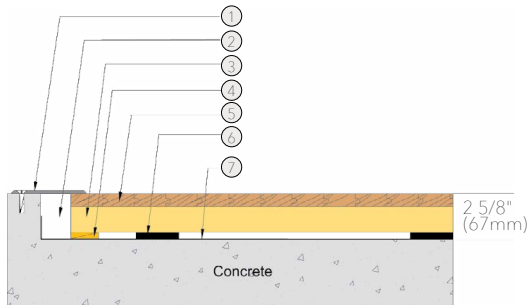

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1 1/2" (38mm) Min. Expansion Space
- 3. AacerCush Sleeper
- 4. Solid Blocking
- 5. MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- 6. 3/8" (10mm) AacerCush Pad
- 7. Vapor Barrier

## EQUIPMENT

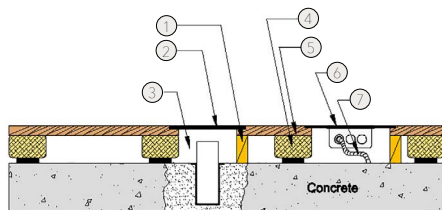

- 1. Solid Blocking at Floor Insert Penetrations
- 2. Floor Plate
- 3. 1 1/2" (38mm) Min. Expansion Space Required at all Insert & Electrical Penetrations
- 4. AacerCush Sleeper
- 5. MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- 6. Flush Electrical Box or Scorer's Box
- 7. Flexible Conduit

Certified



Green Status and LEED Contributors



- FSC® Certified Maple - MRc7
- FSC® Certified Subfloor Components - MRc7
- EQ - 4.2
- Regional Materials - MRc5.1 & 5.2

Resilience

3/8" (10mm) and 5/8" (16mm) AacerCush Pad  
\*other pad options available

Slab Depression

3/8" (10mm) AacerCush Pad  
• 25/32" (20mm) flooring – 2 5/8" (67mm)  
• 33/32" (26mm) flooring – 2 7/8" (73mm)

Subfloor Construction

Sleeper

System Type

Floating

Testing Laboratory



Warranty

Lifetime available

*It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.*



see us at  
**Sweets.com**

