

Anchored PowerLoc LP

FIXED RESILIENT SYSTEM




Anchored PowerLoc LP provides added benefits to our original PowerLoc floor. Like the original system, our LP floor delivers dimensional stability as well as excellent ventilation and uniformity. The LP system includes the recycled rubber ECO resilient pads. The inclusion of special resilient pad slots on the underside of machined sleepers allow desired shock absorbing deflection under athletic impacts while limiting pressure on pads when pressed with heavy non-athletic loads.






- 1. Precision-milled Acer Maple
- 2. 1/2" x 5-1/2" (12mm x 140mm) Pine Subfloor
- 3. Pre-Engineered Plywood Sleeper
- 4. Steel Concrete Anchor with Bushing
- 5. 1/2" (12mm) recessed ECO Pad
- 6. PowerVent Airflow System

WALLBASE

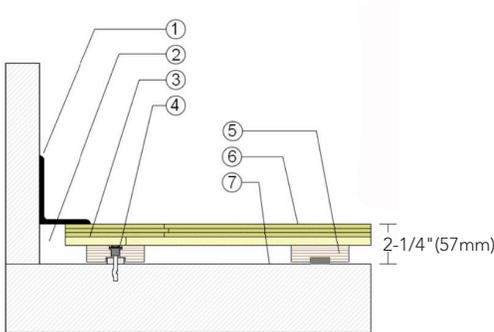


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. 1/2" x 5-1/2" (12mm x 140mm) Pine
- 4. Steel Concrete Anchor & Bushing
- 5. Engineered Plywood Sleeper with Recessed 1/2" (12mm) ECO Pad
- 6. 25/32" (20mm) MFMA Maple Flooring
- 7. Vapor Retarder

THRESHOLD

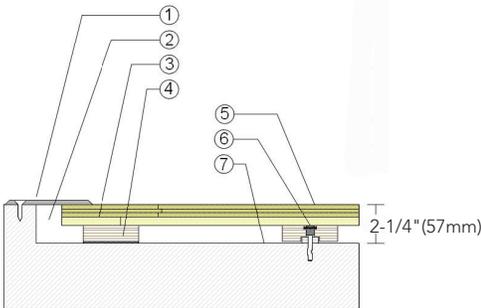

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. 1/2" x 5-1/2" (12mm x 140mm) Pine
- 4. Engineered Plywood Sleeper with Solid Blocking Attached
- 5. 25/32" (20mm) MFMA Maple Flooring
- 6. Steel Concrete Anchor & Bushing
- 7. Vapor Retarder

EQUIPMENT



- 1. Floor Plate
- 2. 1-1/2" (38mm) Min. Expansion Space at all Inserts & Electrical Penetrations
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert

Anchorage

Green Status and LEED Contributors

Drill and Pin



- FSC® Certified Maple - MR
- FSC® Certified Subfloor Components - MR
- Environmental Quality - EQ
- Regional Materials - MR

Resilience

1/2" (12mm) ECO Pad

Slab Depression

- 25/32" (20mm) Flooring - 2-1/4" (57mm)

Optional PowerSleeper Systems

Anchored PowerLoc
Anchored PowerSleeper
Anchored PowerSleeper SE

Optional Protection System

PowerVent™ Airflow System

Subfloor Construction

Engineered sleepers with subfloor

System Type

Fixed Resilient

Testing Laboratory Partners



It is the policy of Aacer Sports Flooring to continuously improve its line of products. Therefore, Aacer Sports Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.