
AacerFlexTM TP

FLOATING SYSTEM



AacerFlexTM TP is a performance sports floor system which meets the ergonomic needs of today's athlete through sufficient force reduction, increased energy return, as well as outstanding ball rebound characteristics. AacerFlex's unique pad minimizes potential deadspots by increasing pad surface contact area without compromising the load bearing ability of the system.



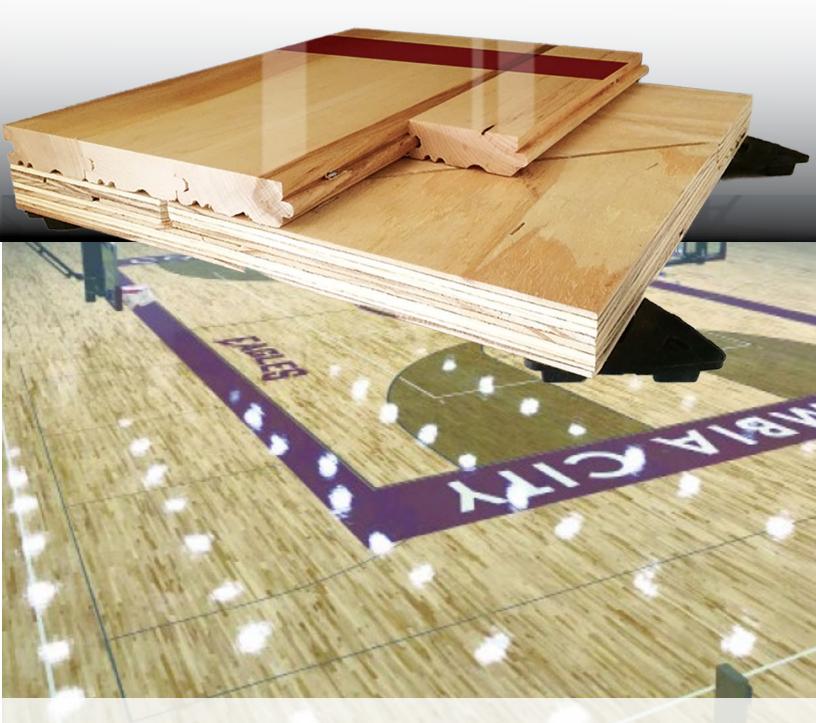

AacerFlex[™]TP


AacerFlexTM TP incorporates precision engineered pads that integrates load bearing ability with enhanced athletic performance. AacerFlexTM TP can be specified for multipurpose rooms, competitive sports applications and dance/aerobics.



- 1. Infinity MFMA Maple
- 2. Two layers of 15/32" (12mm) NOM. Exposure 1, APA Rated Sheathing


3. 1/2" (12mm) TriPower™ Pad

WALL BASE




- 3" x 4" (76mm x 101mm) Vent Cove Base
- 1 1/2" (38mm) Min. Expansion Space
- AacerFlex Plywood Subfloor Panels
- 1/2" (12mm) TriPower™ Pad
- MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- Vapor Barrier

THRESHOLD



- 1. 1/4" (6mm) Aluminum Threshold
- 1 1/2" (38mm) Min. Expansion Space
- Solid Blocking at Doorway
- AacerFlex Plywood Subfloor Panels
- MFMA Maple Flooring 25/32" x 2 1/4" (20mm x 57mm)
- 1/2" (12mm) TriPower™ Pad
- 7. Vapor Barrier

EQUIPMENT



- 1. Floor Plate
- 1 1/2" (38mm) Min. Expansion Space Required at all Insert & Electrical Penetrations
- Concrete Floor Penetration
- Solid Blocking at Insert

Certified





Green Status and LEED Contributors

- FSC® Certified Maple MRc7
- FSC® Certified Subfloor Components - MRc7
- EQ 4.2
- Regional Materials MRc5.1 & 5.2

1/2" (12mm) TriPower™ Pad

Resilience

Slab

*Other pad options available.

Depression

• 25/32" (20mm) flooring -2 1/4" (57mm)

Subfloor Construction Plywood

System Type

Laboratory

Floating Testing





It is the policy of Infinity Flooring to continuously improve its line of products. Therefore, Infinity Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser





















