
ScissorLocTM III FLOATING SYSTEM



Like all of the Aacer ScissorLoc systems, ScissorLoc III features an intersecting solid wood subfloor component design that creates a dimensionally stable system with excellent natural airflow. With it's high shock attenuation pad, ScissorLoc III provides the ultimate in shock absorption. It's excellent resiliency aids in reducing stress related injuries. This system is a good choice for aerobic floors, dance halls, and cardio kick boxing.

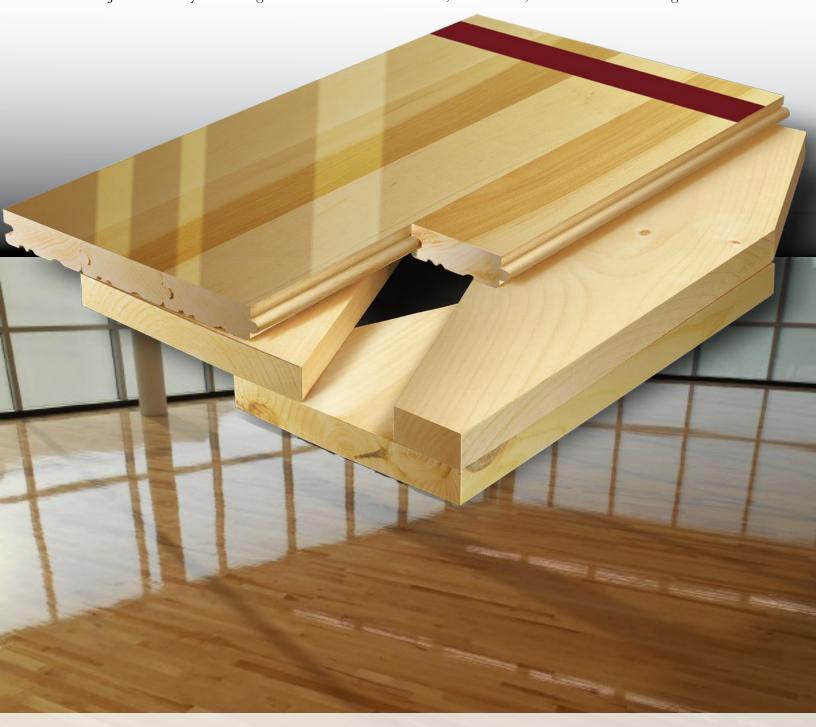

ScissorLoc[™] III

ScissorLocTM III provides an intersecting subfloor design for premium airflow and uniform play.



- 1. Infinity MFMA Maple
- 2. Kiln-dried Pine Upper Subfloor
- 3. Kiln-dried Pine Upper Subfloor
- 4. 3/4" (19mm) TriPower Resilient Pad
- 5. PowerVent Airflow Option

Green Status and LEED Contributors

Resilience

Depression

 $ScissorLoc^{TM}$

Optional

Systems

Optional

Subfloor

Testing

Partners

Construction

System Type

Laboratory

U.S. Patent #

Accessory

Slab



- FSC® Certified Maple MR
- FSC® Certified Subfloor Components - MR
- Environmental Quality EQ
- Regional Materials MR

3/4" (19mm) TriPower Pad *Other pad options available.

• 25/32" (20mm) flooring – 3" (76mm)

ScissorLoc[™] I ScissorLoc[™] II ScissorLoc[™] LP

PowerVent™ Airflow System

Intersecting Kiln-dried Solid Pine

Floating









#5,299,401

WALL BASE




- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1 1/2" (38mm) Min. Expansion Space
- 3. 3/4" x 5-1/2" (19mm x 140mm) Upper and Lower Pine Layers
- 4. 25/32"(20mm) MFMA Maple Flooring
- 5. 3/4" (19mm) Resilient TriPower Pad
- 6. Vapor Retarder

THRESHOLD



- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1 1/2" (38mm) Min. Expansion Space
- 3. 3/4" x 5-1/2" (19mm x 140mm) Upper and Lower Pine Layers
- 4. Solid Blocking at Doorway
- 5. 25/32"(20mm) MFMA Maple Flooring
- 6. 3/4" (19mm) Resilient TriPower Pad
- 7. Vapor Retarder

EQUIPMENT _____



- 1. Floor Plate
- 1 1/2" (38mm) Expansion Space at all Inserts and Electrical Penetrations
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert



















obligation to purchaser



It is the policy of Infinity Wood Floors to continuously improve its line of products. Therefore, Infinity Wood Floors reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or

