



WALLBASE

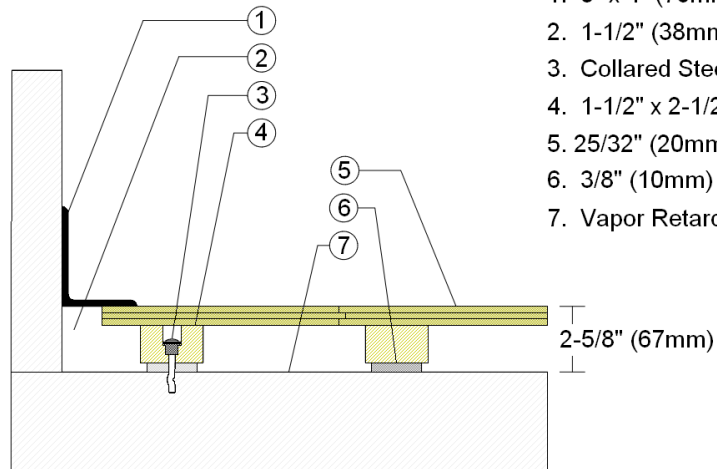


1. 3" x 4" (76mm x 101mm) Vent Cove Base
2. 1-1/2" (38mm) min. Expansion Space
3. Collared Steel Anchor
4. 1-1/2" x 2-1/2" (38mm x 64mm) Sleeper
5. 25/32" (20mm) MFMA Maple Flooring
6. 3/8" (10mm) AacerCush Pad
7. Vapor Retarder

THRESHOLD

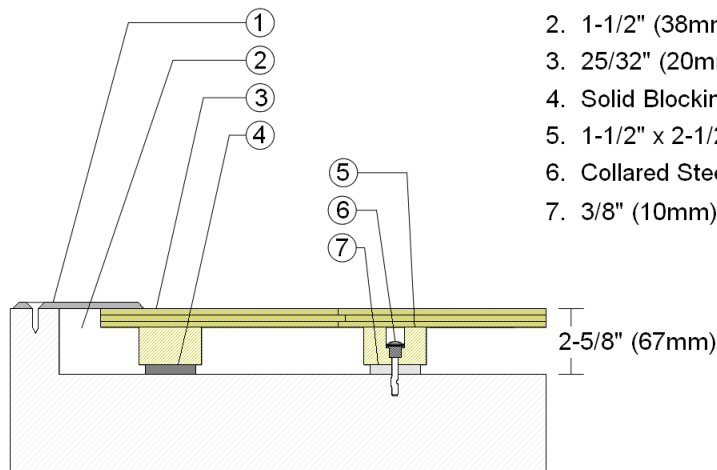

1. 1/4" (6mm) Aluminum Threshold
2. 1-1/2" (38mm) min. Expansion Space
3. 25/32" (20mm) MFMA Maple Flooring
4. Solid Blocking at Doorway
5. 1-1/2" x 2-1/2" (38mm x 64mm) Sleeper
6. Collared Steel Anchor
7. 3/8" (10mm) AacerCush Pad

EQUIPMENT

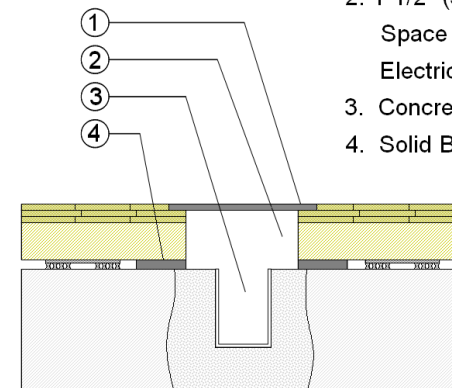

1. Floor Plate
2. 1-1/2" (38mm) Expansion Space at all Inserts and Electrical Penetrations
3. Concrete Floor Penetration
4. Solid Blocking at Insert

Description: ANCHORED AACERCUSH I

Resilience: 3/8" (10mm) AacerCushion pads

Drawn By: RR

Date: 1/1/23

Revisions

| ID | Description | By | Date |
|----|-------------|----|------|
| | | | |
| | | | |