


# PowerPlay™ Panel II

FIXED RESILIENT SYSTEM




**Fabricated PowerPlay Panels include recessed lineal cushions aligned continuously wall to wall below pre-assembled subfloor panels offering a highly resilient athletic floor system. A design that also includes sectional steel channel anchorage for added environmental stability.**



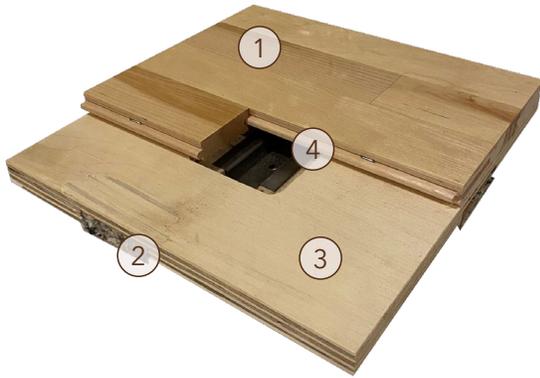


- 1. Precision-milled Aacer Maple
- 2. Recessed Panel Cushion
- 3. Engineered PowerPlay™ Panel
- 4. Sectional Steel Channel Anchorage

## WALLBASE

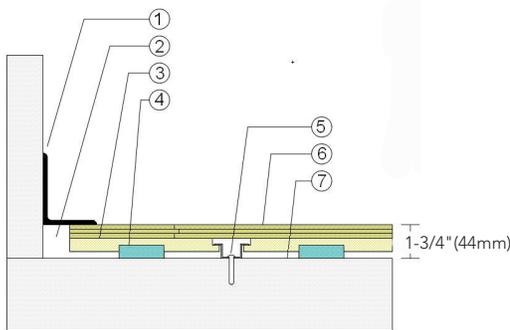


- 1. 3" x 4" (76mm x 101mm) Vent Cove Base
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. PowerPlay™ Panel Subfloor
- 4. Recessed Resilient Cushion
- 5. Anchored Steel Channel Section
- 6. 25/32" (20mm) MFMA Maple Flooring
- 7. Vapor Retarder

## THRESHOLD

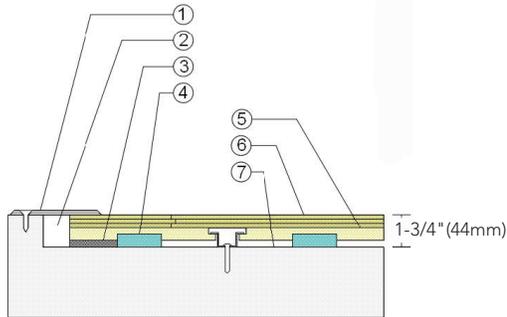

- 1. 1/4" (6mm) Aluminum Threshold
- 2. 1-1/2" (38mm) Min. Expansion Space
- 3. Solid Blocking at Doorway
- 4. Recessed Resilient Cushion
- 5. PowerPlay™ Panel Subfloor
- 6. 25/32" (20mm) MFMA Maple Flooring
- 7. Vapor Retarder

## EQUIPMENT

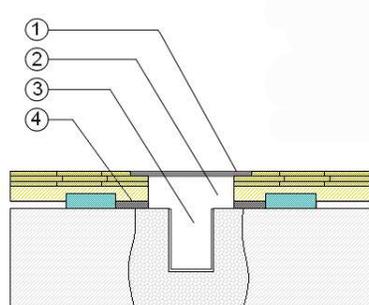

- 1. Floor Plate
- 2. 1-1/2" (38mm) Min. Expansion Space at all Inserts & Electrical Penetrations
- 3. Concrete Floor Penetration
- 4. Solid Blocking at Insert

Anchorage

Steel Channel

Green Status and LEED Contributors



- FSC® Certified Maple - MR
- FSC® Certified Subfloor Components - MR
- Environmental Quality - EQ
- Regional Materials - MR

Resilience

3/4" (19mm) Recessed Resilient Cushion

Slab Depression

- 25/32" (20mm) Flooring - 1-3/4" (44mm)

Optional PowerPlay™ Systems

PowerPlay™ Panel  
PowerPlay™ Cradle  
PowerPlay™ Edge  
PowerPlay™ Trax

Subfloor Construction

Pre-manufactured Panels

System Type

Fixed Resilient

Testing Laboratory Partners



*It is the policy of Aacer Sports Flooring to continuously improve its line of products. Therefore, Aacer Sports Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.*