


Programme Dance II

FIXED RESILIENT SYSTEM




A full resilient blanket cushion below pre-assembled subfloor panels provides excellent uniformity and even response under active impacts throughout. A dual blanket layer option is available to increase shock absorption further.



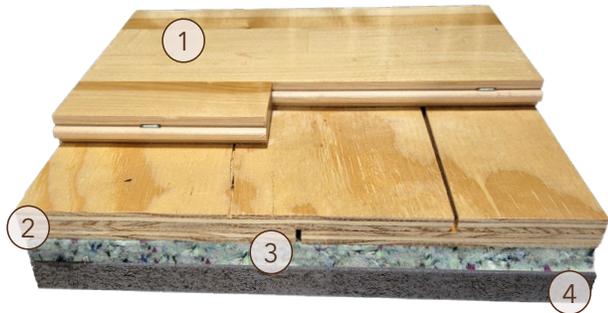


1. Precision-milled MFMA Aacer Maple
2. Programme Dance II Subfloor Panel
3. 1/2" (12mm) Open Cell Resilient Blanket Cushion
4. Surface Vapor Retarder

WALLBASE

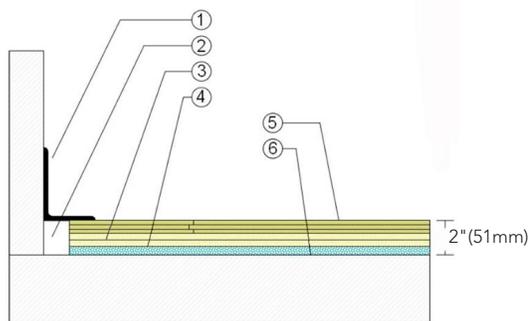


1. 3" x 4" (76mm x 101mm) Vent Cove Base
2. 1-1/2" (38mm) Min. Expansion Space
3. Programme Dance II Subfloor Panel
4. 1/2" (12mm) Open Cell Resilient Blanket Cushion
5. 25/32" (20mm) Aacer MFMA Maple Flooring
6. Vapor Retarder

THRESHOLD

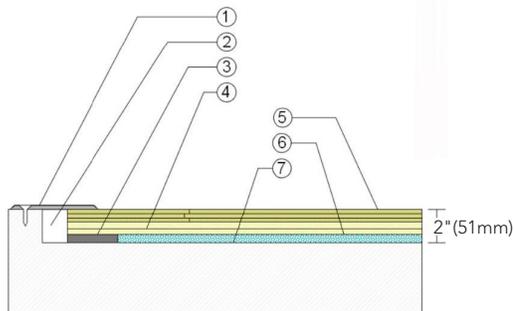

1. 1/4" (6mm) Aluminum Threshold
2. 1-1/2" (38mm) Min. Expansion Space
3. Solid Blocking at Doorway
4. Programme Dance II Subfloor Panel
5. 25/32" (20mm) Aacer MFMA Maple Flooring
6. 1/2" (12mm) Open Cell Resilient Blanket Cushion
7. Vapor Retarder

EQUIPMENT

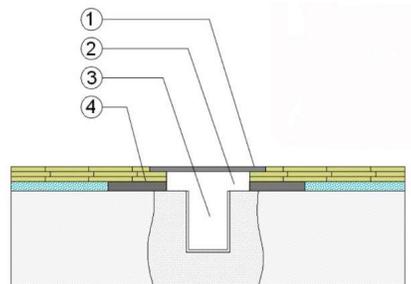

1. Floor Plate
2. 1-1/2" (38mm) Min. Expansion Space at all Inserts & Electrical Penetrations
3. Concrete Floor Penetration
4. Solid Blocking at Insert

Green Status and LEED Contributors



- FSC® Certified Maple - MR (Optional)
- FSC® Certified Subfloor Components - MR (Optional)
- Environmental Quality - EQ
- Regional Materials - MR

Resilience

1/2" (12mm) Blanket Cushion

Slab Depression

- 25/32" (20mm) flooring - 2" (51mm)

Optional Programme Dance Systems

Programme Dance I
Programme Dance III
Programme Dance IV

Subfloor Construction

Pre-manufactured Panels

System Type

Resilient Floating

Testing Laboratory Partners



It is the policy of Aacer Sports Flooring to continuously improve its line of products. Therefore, Aacer Sports Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.